AMETRIX™

c-Scroll

Large

- Extruded aluminum housing
- Die-cast aluminum end caps
- Integrated visor option - solid, perf or opal window
- Die-formed 94% reflective dual-finish anodized aluminum reflector
- Gasketed hinging doorframe - indoor toolless entry, outdoor - fasteners required
- PointGrab™ adjustment

Remote *(Consult factory for outdoor mounting)*

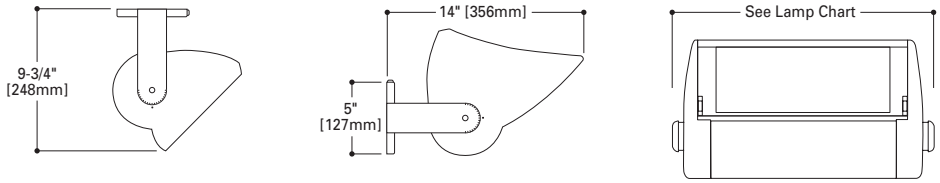

Integral

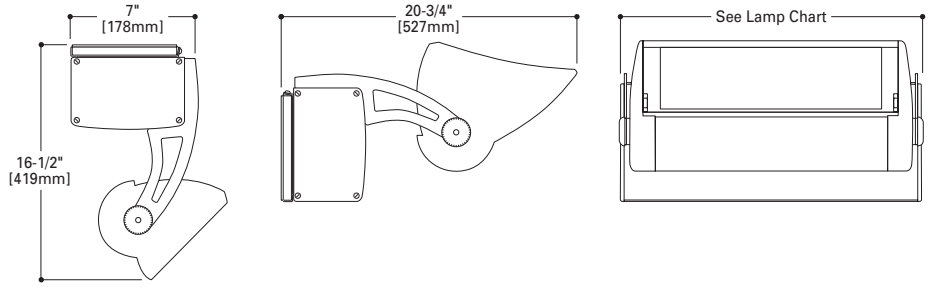

LAMP CHART - Remote

SOURCE	WATTAGE	LENGTH
Tungsten	350/500	22-3/4"
	900/1000	30-3/4"
Metal Halide	175	16-3/4"
	((2) 150)/250/400	22-3/4"
	(2) 400	30-3/4"
Fluorescent	32/42/57	16-3/4"
	(2) 32/42	22-3/4"
	40/50/55	30-3/4"
	(2) 40/50/55	30-3/4"

LAMP CHART - Integral

SOURCE	WATTAGE	LENGTH
Metal Halide	175	16-3/4"
	((2) 150)/250/400	22-3/4"
	(2) 400	30-3/4"
Fluorescent	32/42/57	16-3/4"
	(2) 32/42	22-3/4"
	40/50/55	30-3/4"
	(2) 40/50/55	30-3/4"

Mounting Options

YI01 YI02 YI03 YI04 CR36

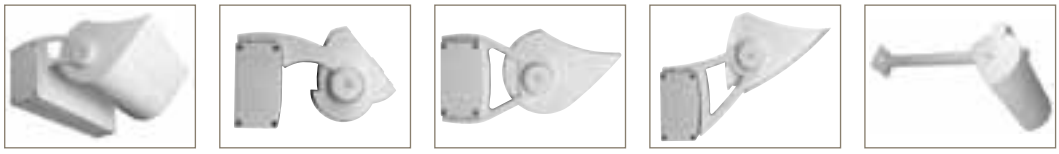

ORDERING INFORMATION

SAMPLE NUMBER: SP-LI-P-1-M400-277-S-YR

Product
- ❑ **SN** c-Scroll No Visor
- ❑ **SS** c-Scroll Solid Visor
- ❑ **SO** c-Scroll Opal Visor
- ❑ **SP** c-Scroll Square Perf Visor

Size - Indoor/Outdoor
- ❑ **LI** Large Indoor
- ❑ **LO** Large Outdoor

Lens
- ❑ **C** Clear
- ❑ **P** Micro-prismatic
- ❑ **N** None**

No. of Lamps
- ❑ **1** 1 Lamp
- ❑ **2** 2 Lamps†

Lamp/Ballast Type
- ❑ **F** Fluorescent (Electronic)
- ❑ **T** Tungsten Halogen
- ❑ **E** Metal Halide* (Electronic)
- ❑ **M** Metal Halide (Magnetic)
- ❑ **R** Metal Halide (Restrike)

Wattage
- ❑ **032** 32W (F) †
- ❑ **040** 40W (F) †
- ❑ **042** 42W (F) †
- ❑ **050** 50W (F) †
- ❑ **055** 55W (F) †
- ❑ **057** 57W (F)
- ❑ **150** 150W (E) († only)
- ❑ **175** 175W (M, R)
- ❑ **250** 250W (M, R)
- ❑ **350** 350W (T)
- ❑ **400** 400W (M, R) †
- ❑ **500** 500W (T)
- ❑ **900** 900W (T)
- ❑ **01K** 1000W (T)

Voltage
- ❑ **120** 120V (T)
- ❑ **220** 277V (1000W only)
- ❑ **240** 240V (900W, 1000W only)
- ❑ **277** 277V
- ❑ **347** 347V

Finish
- ❑ **W** White
- ❑ **S** Silver
- ❑ **B** Bronze
- ❑ **C** Custom (Consult factory)

Mounting
- ❑ **YR** Yoke / Remote
- ❑ **CR36** Cantilever 36" Remote
- ❑ **YI01** Yoke Integral 01
- ❑ **YI02** Yoke Integral 02
- ❑ **YI03** Yoke Integral 03
- ❑ **YI04** Yoke Integral 04

Modification
- ❑ **MOD** Provide description of the modification. (Consult factory)

Accessories
- ❑ **L45** 45° Cross Blade Louver
- ❑ **L25** 25° Cross Blade Louver

Specifications and dimensions subject to change without notice.

* *Not available with all sources or options. (Consult factory)*

** *Only fluorescent (Long Twin Tube)*

† *2 lamp option*